

Earthing & Short Circuit Protection Equipment

Safety

Overhead lines



SAFETY CATALOGUE

661 ERLAIN

Earthing equipment for overhead lines, easy to use for only one operator that besides facilitates the verification of absence of tension with a voltage detector (not included).

Thanks to the operation sections of the metal pole, it has multiple length adjustments.

According to IEC 61230 standard.

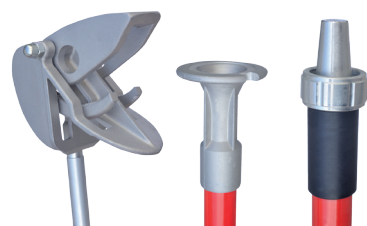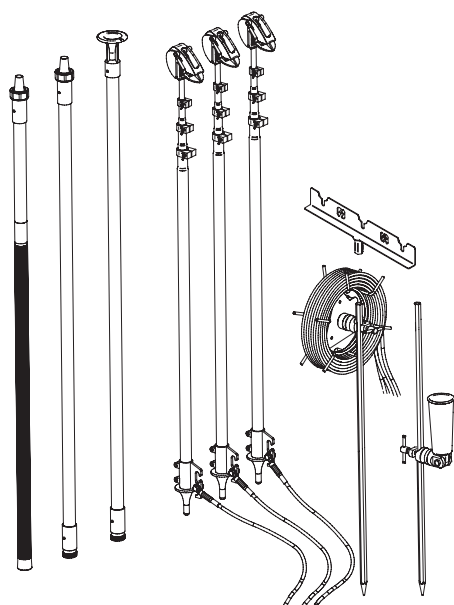

Composed of:

- 3 telescopic metal poles composed of 3 parts with self-locking fixed contact clamp for conductors with diameter between 3 and 22 mm.
- 1 insulating fiberglass pole + Epoxy resin and polyurethane foam filled with 3 sections of 1.72 + 1.65 + 1.63 m; certified by the IEC 60855 Standard. Total length: 5 m (has the option of using it without the middle section with a remaining total length of 3.4 m).
- 1 poles holder.
- 1 coil with 3 copper cables of 35 mm² section and 10 m length.
- 2 galvanized steel earthing rod with hexagonal section of 1 m.
- 1 insulating pole support.
- 1 carrying bag.

Code	Ref.	Extended lenght metal pole	Folded lenght metal pole	N° section metal pole	Short circuit current Max. ICC
660400	ERLAIN-3/11	6.00 m	2.20 m	3	8 KA/1S
660405	ERLAIN-4/10	5.10 m	1.50 m	4	8 KA/1S