

Mechanical tools / Crimping tools for insulated and non-insulated ferrules

Mini-Type self-adjustable crimping plier  
Insulated and non-insulated ferrules




## 20104 SF-42

- Lugs are effortlessly inserted into the crimping pliers from the side.
- Compatible with all types of ferrules, including twin ferrules.
- Compression system by squared diaphragm.



Code	Ref.	Crimping range	AWG	Length	Weight
390125	SF-42	0.25-10 mm <sup>2</sup>	24-8	175 mm	0.4 kg

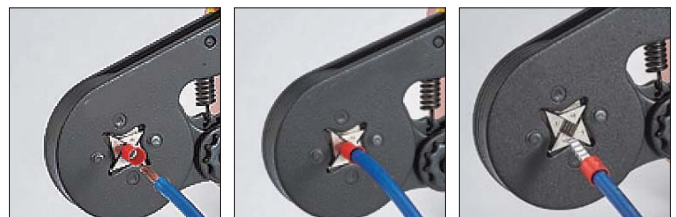

Quick pressure adjustment button, divided into three pressure output levels: 0.25–2.5 mm<sup>2</sup>, 4–6 mm<sup>2</sup> and 10 mm<sup>2</sup>.



Automatic adjustment to the terminal's cross-sectional area during crimping, facilitating operation with different sizes. Ensures optimal contact surface and complies with DIN standards.



When the crimp size needs to be changed, simply pull the adjustment knob up, turn it to the required setting, and release.