

sofamel

Product Technical Specifications

ELECTRONIC VOLTAGE DETECTOR

POWER LIGHT-3/10

Medium voltage - Optical & Acoustic

Functionality

Electronic voltage detector with microcontroller and direct contact detection.

Its function is to detect voltage by direct contact to indicate to the operator if there is an electric field, and to ensure that the area is safe for work.


Electrical Characteristics

It has a self-checking system for the circuit by pressing the test button.

Auto-ignition with presence of voltage.

Automatic shutdown to standby mode after two minutes with absence of voltage. In this mode the consumption is less than 1 μ A. Stops working when the battery is low.

Power supply: 1.5V AAA alkaline battery.

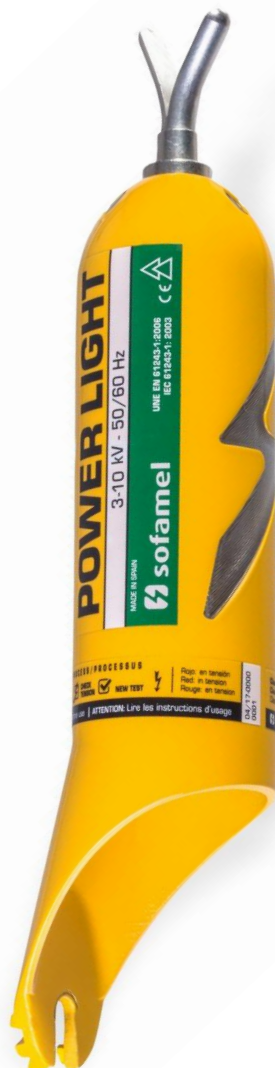



ELECTRONIC VOLTAGE DETECTOR

Medium voltage - Optical & Acoustic



Product Features

Flashlight in the upper part with high brightness and low power consumption LEDs, for use in dark places. The use of the flashlight is independent of the detection system.

Voltage presence indicator by means of multiple high luminosity red LEDs at 360° and intermittent 79 dB acoustic signal by means of a buzzer.

Indicator of absence of voltage by means of multiple green LEDs of high luminosity at 360°.

Low battery is indicated by orange LED.

Self-verification system for the complete circuit by pressing the test button.

Stops working when battery is low.

Working temperature range: -25° C to +55° C.

Auto-ignition when voltage is present.

Automatic shutdown to standby mode after two minutes with absence of voltage. In this mode the consumption is less than 1µA.

Indoor and outdoor use by means of an insulating pole suitable for the voltage range of the detector. Coupling to the pole by means of Universal head.

Batteries included 2xAAA, greater capacity and durability.

Supplied in reinforced case.

Voltage range depending on the model: 3 to 10 kV.

Certificates:

In compliance with regulations:

IEC 61243:2003+A1:2009: Live working - Voltage detectors - Part 1: Capacitive type to be used for voltages exceeding 1 kV a.c.

UNE-EN 61243-1:2006+A1:2011: Live working - Voltage detectors -- Part 1: Capacitive type to be used for voltages exceeding 1 kV a.c.

IP65

Datos sujetos a cambios
2021, July 08

© 2017 Sofamel SLU
Todos los derechos reservados.

Versión: R2-7.2 COM01

Las especificaciones están sujetas a cambios sin previo aviso.

sofamel

Product Technical Specifications



ELECTRONIC VOLTAGE DETECTOR

POWER LIGHT-10/30

Medium voltage - Optical & Acoustic

Functionality

Electronic voltage detector with microcontroller and direct contact detection.

Its function is to detect voltage by direct contact to indicate to the operator if there is an electric field, and to ensure that the area is safe for work.

Electrical Characteristics

It has a self-checking system for the circuit by pressing the test button.

Auto-ignition with presence of voltage.

Automatic shutdown to standby mode after two minutes with absence of voltage. In this mode the consumption is less than 1 μ A. Stops working when the battery is low.

Power supply: 1.5V AAA alkaline battery.



ELECTRONIC VOLTAGE DETECTOR

Medium voltage - Optical & Acoustic



Product Features

Flashlight in the upper part with high brightness and low power consumption LEDs, for use in dark places. The use of the flashlight is independent of the detection system.

Voltage presence indicator by means of multiple high luminosity red LEDs at 360° and intermittent 79 dB acoustic signal by means of a buzzer.

Indicator of absence of voltage by means of multiple green LEDs of high luminosity at 360°.

Low battery is indicated by orange LED.

Self-verification system for the complete circuit by pressing the test button.

Stops working when battery is low.

Working temperature range: -25° C to +55° C.

Auto-ignition when voltage is present.

Automatic shutdown to standby mode after two minutes with absence of voltage. In this mode the consumption is less than 1µA.

Indoor and outdoor use by means of an insulating pole suitable for the voltage range of the detector. Coupling to the pole by means of Universal head.

Batteries included 2xAAA, greater capacity and durability.

Supplied in reinforced case.

Voltage range depending on the model: 10 to 30 kV.

Certificates:

In compliance with regulations:

IEC 61243:2003+A1:2009: Live working - Voltage detectors - Part 1: Capacitive type to be used for voltages exceeding 1 kV a.c.

UNE-EN 61243-1:2006+A1:2011: Live working - Voltage detectors -- Part 1: Capacitive type to be used for voltages exceeding 1 kV a.c.

IP65

Datos sujetos a cambios
2021, July 08

© 2017 Sofamel SLU
Todos los derechos reservados.

Versión: R2-7.2 COM01

Las especificaciones están sujetas a cambios sin previo aviso.



Thomas Alva Edison, 16-17 - Pol. Industrial Plans d'Arau - 08787 La Pobla de Claramunt (Barcelona) - Spain
Tel. +34 93 808 79 80 - Info@sofamel.es
www.sofamel.com

sofamel

Product Technical Specifications

ELECTRONIC VOLTAGE DETECTOR

POWER LIGHT-10/36

Medium voltage - Optical & Acoustic

Functionality

Electronic voltage detector with microcontroller and direct contact detection.

Its function is to detect voltage by direct contact to indicate to the operator if there is an electric field, and to ensure that the area is safe for work.

Electrical Characteristics

It has a self-checking system for the circuit by pressing the test button.

Auto-ignition with presence of voltage.

Automatic shutdown to standby mode after two minutes with absence of voltage. In this mode the consumption is less than 1 μ A. Stops working when the battery is low.

Power supply: 1.5V AAA alkaline battery.





ELECTRONIC VOLTAGE DETECTOR

Medium voltage - Optical & Acoustic



Product Features

Flashlight in the upper part with high brightness and low power consumption LEDs, for use in dark places. The use of the flashlight is independent of the detection system.

Voltage presence indicator by means of multiple high luminosity red LEDs at 360° and intermittent 79 dB acoustic signal by means of a buzzer.

Indicator of absence of voltage by means of multiple green LEDs of high luminosity at 360°.

Low battery is indicated by orange LED.

Self-verification system for the complete circuit by pressing the test button.

Stops working when battery is low.

Working temperature range: -25° C to +55° C.

Auto-ignition when voltage is present.

Automatic shutdown to standby mode after two minutes with absence of voltage. In this mode the consumption is less than 1µA.

Indoor and outdoor use by means of an insulating pole suitable for the voltage range of the detector. Coupling to the pole by means of Universal head.

Batteries included 2xAAA, greater capacity and durability.

Supplied in reinforced case.

Voltage range depending on the model: 10 to 36 kV.

Certificates:

In compliance with regulations:

IEC 61243:2003+A1:2009: Live working - Voltage detectors - Part 1: Capacitive type to be used for voltages exceeding 1 kV a.c.

UNE-EN 61243-1:2006+A1:2011: Live working - Voltage detectors -- Part 1: Capacitive type to be used for voltages exceeding 1 kV a.c.

IP65

Datos sujetos a cambios
2021, July 08

© 2017 Sofamel SLU
Todos los derechos reservados.

Versión: R2-7.2 COM01

Las especificaciones están sujetas a cambios sin previo aviso.

sofamel

Product Technical Specifications

ELECTRONIC VOLTAGE DETECTOR

POWER LIGHT-11/33

Medium voltage - Optical & Acoustic

Functionality

Electronic voltage detector with microcontroller and direct contact detection.

Its function is to detect voltage by direct contact to indicate to the operator if there is an electric field, and to ensure that the area is safe for work.


Electrical Characteristics

It has a self-checking system for the circuit by pressing the test button.

Auto-ignition with presence of voltage.

Automatic shutdown to standby mode after two minutes with absence of voltage. In this mode the consumption is less than 1 μ A. Stops working when the battery is low.

Power supply: 1.5V AAA alkaline battery.

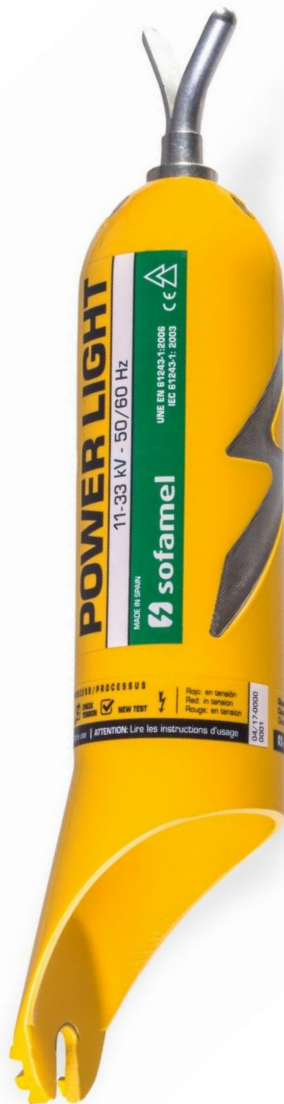



ELECTRONIC VOLTAGE DETECTOR

Medium voltage - Optical & Acoustic



Product Features

Flashlight in the upper part with high brightness and low power consumption LEDs, for use in dark places. The use of the flashlight is independent of the detection system.

Voltage presence indicator by means of multiple high luminosity red LEDs at 360° and intermittent 79 dB acoustic signal by means of a buzzer.

Indicator of absence of voltage by means of multiple green LEDs of high luminosity at 360°.

Low battery is indicated by orange LED.

Self-verification system for the complete circuit by pressing the test button.

Stops working when battery is low.

Working temperature range: -25° C to +55° C.

Auto-ignition when voltage is present.

Automatic shutdown to standby mode after two minutes with absence of voltage. In this mode the consumption is less than 1µA.

Indoor and outdoor use by means of an insulating pole suitable for the voltage range of the detector. Coupling to the pole by means of Universal head.

Batteries included 2xAAA, greater capacity and durability.

Supplied in reinforced case.

Voltage range depending on the model: 11 to 33 kV.

Certificates:

In compliance with regulations:

IEC 61243:2003+A1:2009: Live working - Voltage detectors - Part 1: Capacitive type to be used for voltages exceeding 1 kV a.c.

UNE-EN 61243-1:2006+A1:2011: Live working - Voltage detectors -- Part 1: Capacitive type to be used for voltages exceeding 1 kV a.c.

IP65

Datos sujetos a cambios
2021, July 08

© 2017 Sofamel SLU
Todos los derechos reservados.

Versión: R2-7.2 COM01

Las especificaciones están sujetas a cambios sin previo aviso.

sofamel

Product Technical Specifications

ELECTRONIC VOLTAGE DETECTOR

POWER LIGHT-22/66

Medium voltage - Optical & Acoustic

Functionality

Electronic voltage detector with microcontroller and direct contact detection.

Its function is to detect voltage by direct contact to indicate to the operator if there is an electric field, and to ensure that the area is safe for work.

Electrical Characteristics

It has a self-checking system for the circuit by pressing the test button.

Auto-ignition with presence of voltage.

Automatic shutdown to standby mode after two minutes with absence of voltage. In this mode the consumption is less than 1 μ A. Stops working when the battery is low.

Power supply: 1.5V AAA alkaline battery.





ELECTRONIC VOLTAGE DETECTOR

Medium voltage - Optical & Acoustic



Product Features

Flashlight in the upper part with high brightness and low power consumption LEDs, for use in dark places. The use of the flashlight is independent of the detection system.

Voltage presence indicator by means of multiple high luminosity red LEDs at 360° and intermittent 79 dB acoustic signal by means of a buzzer.

Indicator of absence of voltage by means of multiple green LEDs of high luminosity at 360°.

Low battery is indicated by orange LED.

Self-verification system for the complete circuit by pressing the test button.

Stops working when battery is low.

Working temperature range: -25° C to +55° C.

Auto-ignition when voltage is present.

Automatic shutdown to standby mode after two minutes with absence of voltage. In this mode the consumption is less than 1µA.

Indoor and outdoor use by means of an insulating pole suitable for the voltage range of the detector. Coupling to the pole by means of Universal head.

Batteries included 2xAAA, greater capacity and durability.

Supplied in reinforced case.

Voltage range depending on the model: 22 to 66 kV.

Certificates:

In compliance with regulations:

IEC 61243:2003+A1:2009: Live working - Voltage detectors - Part 1: Capacitive type to be used for voltages exceeding 1 kV a.c.

UNE-EN 61243-1:2006+A1:2011: Live working - Voltage detectors -- Part 1: Capacitive type to be used for voltages exceeding 1 kV a.c.

IP65

Datos sujetos a cambios
2021, July 08

© 2017 Sofamel SLU
Todos los derechos reservados.

Versión: R2-7.2 COM01

Las especificaciones están sujetas a cambios sin previo aviso.

sofamel

Product Technical Specifications



ELECTRONIC VOLTAGE DETECTOR

POWER LIGHT-22/79

Medium voltage - Optical & Acoustic

Functionality

Electronic voltage detector with microcontroller and direct contact detection.

Its function is to detect voltage by direct contact to indicate to the operator if there is an electric field, and to ensure that the area is safe for work.

Electrical Characteristics

It has a self-checking system for the circuit by pressing the test button.

Auto-ignition with presence of voltage.

Automatic shutdown to standby mode after two minutes with absence of voltage. In this mode the consumption is less than 1 μ A. Stops working when the battery is low.

Power supply: 1.5V AAA alkaline battery.



ELECTRONIC VOLTAGE DETECTOR

Medium voltage - Optical & Acoustic



Product Features

Flashlight in the upper part with high brightness and low power consumption LEDs, for use in dark places. The use of the flashlight is independent of the detection system.

Voltage presence indicator by means of multiple high luminosity red LEDs at 360° and intermittent 79 dB acoustic signal by means of a buzzer.

Indicator of absence of voltage by means of multiple green LEDs of high luminosity at 360°.

Low battery is indicated by orange LED.

Self-verification system for the complete circuit by pressing the test button.

Stops working when battery is low.

Working temperature range: -25° C to +55° C.

Auto-ignition when voltage is present.

Automatic shutdown to standby mode after two minutes with absence of voltage. In this mode the consumption is less than 1µA.

Indoor and outdoor use by means of an insulating pole suitable for the voltage range of the detector. Coupling to the pole by means of Universal head.

Batteries included 2xAAA, greater capacity and durability.

Supplied in reinforced case.

Voltage range depending on the model: 22 to 79 kV.

Certificates:

In compliance with regulations:

IEC 61243:2003+A1:2009: Live working - Voltage detectors - Part 1: Capacitive type to be used for voltages exceeding 1 kV a.c.

UNE-EN 61243-1:2006+A1:2011: Live working - Voltage detectors -- Part 1: Capacitive type to be used for voltages exceeding 1 kV a.c.

IP65

Datos sujetos a cambios
2021, July 08

© 2017 Sofamel SLU
Todos los derechos reservados.

Versión: R2-7.2 COM01

Las especificaciones están sujetas a cambios sin previo aviso.