Earthing devices / Equipment for the railway sector

Railway equipment with PDC clamp (Ø 12–27 mm)


30910 PATF-PDC

Spring-type PDC clamp for cylindrical conductors with diameters between 12 to 27 mm; available with TTR or TTSR reel and 50 mm².


According to IEC 61230 standard.





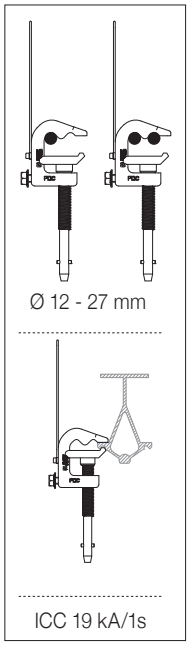







Example of key lockdown

Optional
Catenary pole with handguard for use at trackside (cod. 615019)





Composed of:

- 1 PDC aluminium alloy clamp with screw tightening and bayonet fitting, for cylindrical conductors with diameters between 12 and 27 mm.
- 1 copper cable with PVC insulation, 50 mm² cross-section and 7 m length.
- 1 TTR or TTRS earthing lathes.
- 1 nylon bag for storing and transporting the equipment.

Code	Ref.	Cable section (mm²)	Length (m)	Short-circuit current Max. ICC	Clamping capacity
666140	PATF-PDC/05007-TTR	50	7	12 kA/1s	Ø 12-27 mm
666150	PATF-PDC/05007-TTSR0				

* Depending on availability, the colour of the bag may vary.