Earthing devices / Low-voltage electric panels


Reinforced equipment with MPUH-L clamps and 120 mm² cable


30902 ECBT-4MPUHL


High-capacity LV version with MPUH-L clamps and 120 mm² cabling, suitable for applications requiring higher short-circuit current (ICC). Insulated handle with multipurpose head for safe and precise operation.

According to IEC 61230 standard.





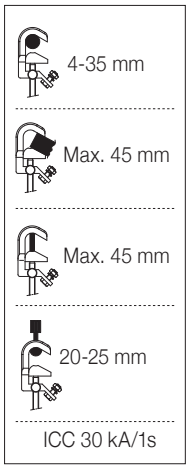



Composed of:

- 4 MPUH-L aluminium-alloy clamps with screw tightening
- 1 insulated handle with multipurpose head.
- 3 copper PVC-insulated cables, 120 mm² cross-section, 0.6 m long.
- 1 copper PVC-insulated cable, 120 mm² cross-section, 2 m long.
- 1 TT-50 earthing lathe.
- 1 nylon bag for storing and transporting the equipment.

Code	Ref.	Cable section (mm²)	Length (m)	Short-circuit current Max. ICC
659200	**ECBT-4MPUHL-120120**	120 / 120	0.6 / 2	30 kA/1s

* Depending on availability, the colour of the bag may vary.