Earthing devices / Low-voltage electric panels


Equipment with MPUL clamps with integrated handle


30902 ECBT-4MPUL


MPUL clamps with integrated insulated handle and screw tightening for quick connection to bare cylindrical conductors, fixed points, or busbars. Available with different cable cross-sections (70/95/120 mm²), providing higher short-circuit capacity.

According to IEC 61230 standard.





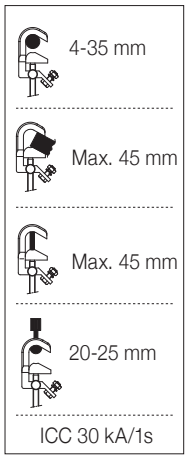



Composed of:

- 4 MPUL aluminium-alloy clamps with screw tightening and insulated handle.
- 3 copper PVC-insulated cables, 70/95/120 mm² cross-section (depending on model), 0.6 m long.
- 1 copper PVC-insulated cable, 70/95/120 mm² cross-section (depending on model), 2 m long.
- 1 TT-50 earthing lathe.
- 1 nylon bag for storing and transporting the equipment.

Code	Ref.	Cable section (mm²)	Length (m)	Short-circuit current Max. ICC
659201	**ECBT-4MPUL-7070**	70 / 70	0.6 / 2	19 kA/1s
659209	**ECBT-4MPUL-9595**	95 / 95		25.5 kA/1s
659210	**ECBT-4MPUL-120120**	120 / 120		30 kA/1s

* Depending on availability, the colour of the bag may vary.