Earthing devices / Medium voltage substations - Screw clamps

Equipment with 2 MPL clamps + 1 MPLP carrying clamp


30905 PATL-MPLB


Two MPL screw clamps and one MPLP carrying clamp for lifting all three clamps together. A quick solution for overhead lines with specified conductor diameters.


According to IEC 61230 standard.





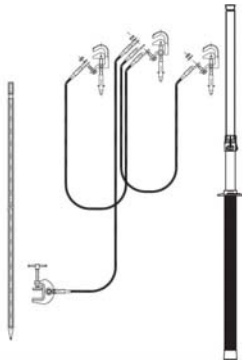

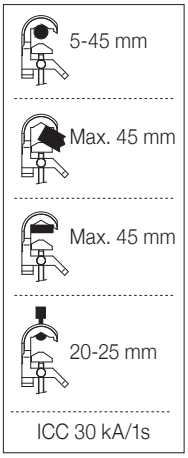

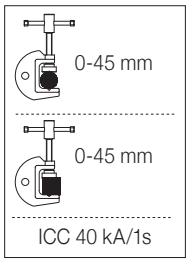

Composed of:

- 2 MPL aluminium-alloy screw clamps for cylindrical conductors with diameters between 5 and 45 mm.
- 1 MPLP aluminium-alloy carrying clamp with screw tightening, for cylindrical conductors with diameters between 5 and 45 mm.
- 2 copper PVC-insulated cables, 2.5 m long, 70 mm² cross-section.
- 1 copper PVC-insulated cable, 15 m long, 70 mm² cross-section.
- 1 TT-50 earthing lathe.
- 1 earthing rod.
- 1 telescopic pole (1.10 m retracted, 2 m extended).
- 1 bag for storing and transporting the equipment.
- 1 carrying cover for the pole and earthing rod.

Code	Ref.	Cable section (mm²)	Length (m)	Short-circuit current Max. ICC
665285	**PATL-MPLB/7070**	70 / 70	2.5 / 15	19 kA/1s

* Depending on availability, the colour of the bag and the cover may vary.