
Earthing devices / Low-voltage electric panels

Earthing and short-circuiting equipment with blades for NH fuses

30902 ECBT-ID-NH

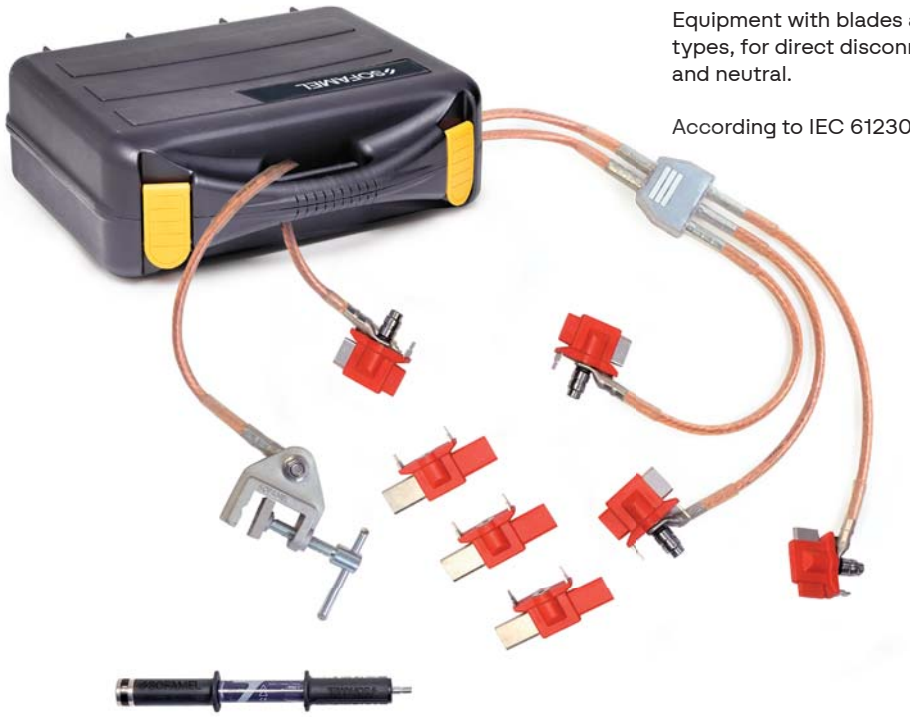

Equipment with blades adapted to NH fuse holders of all types, for direct disconnection and earthing of the phases and neutral.

According to IEC 61230 standard.



NH00



NH1-3



TT-38A

Composed of:

- 4 NH00 disconnecting and earthing blades.
- 4 NH1-3 disconnecting and earthing blades.
- 3 copper PVC-insulated cables, 16 mm² cross-section, 0.50 m long for phase short-circuiting.
- 1 copper PVC-insulated cable, 16 mm² cross-section, 0.50 m long for neutral.
- 1 copper PVC-insulated cable, 16 mm² cross-section, 1 m long for earthing.
- 1 5-way branch-joint connector.
- 1 insulated pole for placing the blades.
- 1 TT-38A earthing lathe.
- 1 plastic case for storing and transporting the equipment.

Code	Ref.	Cable section (mm²)	Length (m)	Short-circuit current Max. ICC
659217	**ECBT-ID-NH**	16 / 16 / 16	0.5 / 0.5 / 1	4.3 kA/1s