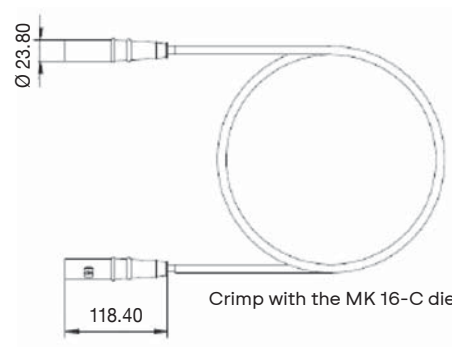


Earthing devices / Low-voltage overhead lines
By-pass cable set with female bayonet connectors
**30901 KIT SHUNT
KS-2FB-05016**

The KS-2FB-05016 kit is designed for temporary current by-passes, provisional bridging, and measurement operations in low-voltage systems. It includes a flexible 50 mm² shunt cable with female bayonet connectors, protected with Santoprene insulating sleeves, and supplied in a rigid carrying case.

Its robust construction and ease of installation make it an essential tool for maintenance work, testing, and commissioning on low-voltage overhead lines.


Main features:

- 50 mm² shunt cable, 1.6 m long.
- Female bayonet connectors in tinned brass.
- Santoprene insulating sleeves.
- Total weight (including case): 3.1 kg.

Code	Ref.	Cable section (mm ²)	Length (m)	Set weight (kg)
30901021	KS-2FB-05016	50	1.6	3.1