

Low Voltage Electric Panels

Earthing and Short - Circuit Equipment


SAFETY CATALOGUE



CLAMPS

Earthing clamps

Mod. MPUC

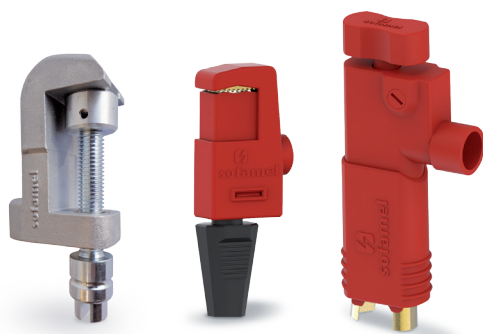

MPUC

SHUNT
(SHPC, SHCD
and SHPL)

PTA

Code	Ref.	Dimensions	Capacity	Short circuit current Max. ICC	Weight
659133	MPUCN	148 x 55 x 33 mm	∩ 35 mm	12 KA/1s	250 gr
659139	MPUCF	148 x 55 x 33 mm	∅ 20 mm		

Mod. PTA

Code	Ref.	∅ / ∅ max.	Short circuit current Max. ICC	Weight
659132	PTA	8 - 22 mm	6.9 KA/1s	325 gr

Mod. SHUNT

Code	Ref.	Dimensions	Capacity	Point Proof	Splice				Short circuit current Max. ICC	Voltage Max.	Weight
659020	SHPC	143 x 54 x 26 mm	∅ 35-240 mm ²			•			200 A	1000 V	250 gr
659021	SHCD	143 x 54 x 26 mm	∅ 35-240 mm ²	Taking 4 mm	Connector M8		•				
659022	SHPL	143 x 54 x 26 mm	∩ 2-25 mm				•				