Accessories for low voltage electric panels

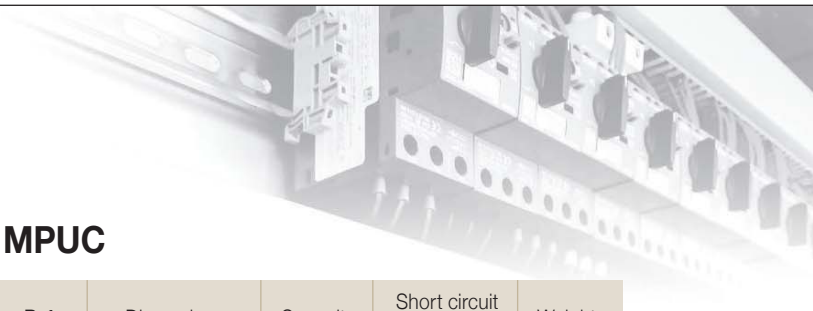

30903 EARTHING CLAMPS

MPUC | SHUNT (SHPC, SHCD and SHPL) | PTA

30903 MPUC

Code	Ref.	Dimensions	Capacity	Short circuit current Max. ICC	Weight
659133	**MPUCN**	148 x 55 x 33 mm	⏍ 35 mm	12 kA/1s	250 g
659139	**MPUCF**	148 x 55 x 33 mm	∅ 20 mm		

30903 PTA

Code	Ref.	⬡ / Ø max.	Short circuit current Max. ICC	Weight
659132	**PTA**	8 - 22 mm	6,9 kA/1s	325 g

30903 SHUNT

Code	Ref.	Dimensions	Capacity	Point proof	Splice	▀	▄	▬	Max. working current	Voltage Max.	Weight
659020	**SHPC**	143 x 54 x 26 mm	∅ 25-240 mm²	Taking 4 mm	Connector M8	•			200 A	1000 V	250 g
659021	**SHCD**	143 x 54 x 26 mm	∅ 25-240 mm²				•				
659022	**SHPL**	143 x 54 x 26 mm	⏍ 2-25 mm					•			

Low voltage