

sofamel

Product Technical Specifications

Model PF

Non insulated cord end terminal

Functionality

These pre-insulated copper terminals are used where a connection is required that allows the cable to connect and disconnect quickly from the components, where screws or clamps are used to make electrical contact with the cable.



Product Features

Are manufactured from electrolytic copper capillary tube with a tinned surface finish to improve electrical contact. Insulating material with flame retardant additives.

Certified

They have been tested according to what is established in the **UNE 21021** standard: Connecting parts for power lines up to 72.5 kV.

RoHS compliance.

Datos sujetos a cambios
2020, Mayo 25

© 2017 Sofamel SLU
Todos los derechos reservados.

Versión: R2-7.2 COM01


Las especificaciones están sujetas a cambios sin previo aviso.



Model PF

NON ISULATED CORD END TERMINAL

Dimensions

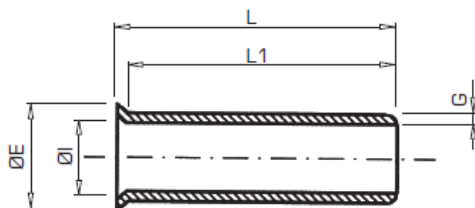

Código	Ref.	Sección (mm ²)	Dimensiones (mm)				
			L	L1	ØI	ØE	G
265100	PF-0,50/6	0,50	6,1	5,3	1,3	2,1	0,15
265110	PF-0,75/6	0,75	6,1	5,3	1,7	2,5	0,15
265120	PF-1,00/10	1,00	10,0	9,3	1,4	2,5	0,15
265140	PF-1,50/10	1,50	10,0	9,0	1,7	2,8	0,15
265160	PF-2,50/10	2,50	10,0	9,0	2,2	3,4	0,15
265190	PF-4,00/12	4,00	12,0	11,0	2,8	4,0	0,20
265200	PF-6,00/12	6,00	12,0	11,0	3,5	4,7	0,20
265220	PF-10,00/18	10,00	18,0	17,0	4,5	5,8	0,20
265240	PF-16,00/18	16,00	18,0	17,0	5,8	7,5	0,20
265255	PF-25,00/22	25,00	22,5	21,0	7,7	9,5	0,20
265258	PF-35,00/25	35,00	25,5	24,0	8,7	11,0	0,20
265265	PF-50,00/25	50,00	25,5	24,0	10,9	13,5	0,20