

Connections / Copper connectors


10102 TL

Copper cable lug long barrel

TL cable lug manufactured from electrolytic copper tubing with a tin-plated surface finish to improve electrical contact.

The longer barrel length ensures a better electrical connection in more adverse conditions.

According to IEC 61238-1-1 standard.

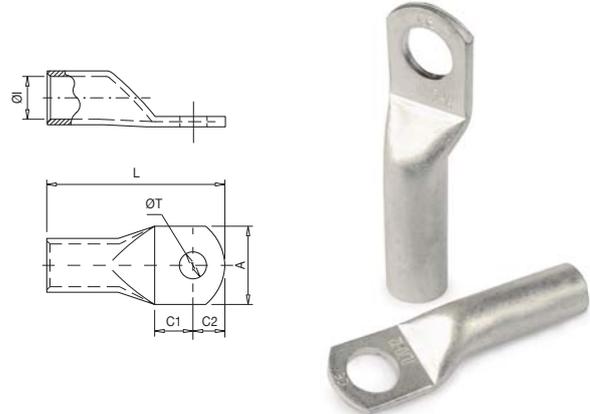

Code	Ref.	Section (mm ²)		Dimensions (mm)						Kg x 100	Bag	Box
				ØI	L	ØT	A	C1	C2			
006270	TL-10/6	10	6	4.7	35	6.4	11.9	7.0	6.0	0.492	100	600
006280	TL-10/8		8		38	8.3	15.0	8.0	8.0	0.513	100	600
006320	TL-16/6	16	6	5.6	39	6.4	11.9	7.0	6.0	0.685	100	400
006330	TL-16/8		8		41.5	8.3	15.0	8.0	7.5	0.691	100	400
006370	TL-25/8	25	8	7.1	50	8.3	15.0	8.5	7.5	1.128	50	250
006380	TL-25/10		10		55	10.5	18.0	11.0	10.0	1.193	50	200
006420	TL-35/8	35	8	8.7	53	8.3	15.7	9.0	8.0	1.685	50	150
006430	TL-35/10		10		57	10.5	19.0	11.0	10.0	1.765	50	150
006520	TL-50/10	50	10	9.8	63	10.5	20.0	11.0	10.0	2.372	20	120
006530	TL-50/12		12		67	13.0	21.0	13.0	12.0	2.402	20	100
006580	TL-70/10	70	10	11.5	69	10.5	21.5	11.0	10.0	3.600	10	40
006590	TL-70/12		12		71	13.0	21.5	12.0	11.0	3.561	10	40
006650	TL-95/12	95	12	13.5	79	13.0	24.7	12.0	12.0	5.260	10	40
006660	TL-95/14		14		83	14.5	24.7	15.0	13.0	5.137	10	40
006670	TL-95/16	16	86	16.5	27.0	16.0	15.0	5.191	10	40		
006710	TL-120/12	120	12	15.6	87	13.0	28.9	14.0	12.0	8.231	10	30
006720	TL-120/14		14		91	14.5	28.9	16.0	14.0	8.630	10	30
006730	TL-120/16		16		95	16.5	28.9	17.0	16.0	8.834	10	30
006760	TL-150/12	150	12	16.5	99	13.0	30.4	16.0	14.0	10.243	10	30
006770	TL-150/14		14		103	14.5	30.4	18.0	16.0	10.290	10	30
006780	TL-150/16		16		103	16.5	30.4	18.0	16.0	10.423	10	30
006810	TL-185/12		12		108	13.0	34.0	16.0	14.0	14.417	10	20
006820	TL-185/14	185	14	18.8	112	14.5	34.0	18.0	16.0	14.891	10	20
006830	TL-185/16		16		113	16.5	34.0	18.0	17.0	14.746	10	20
006860	TL-240/12		12		114	13.0	38.4	16.0	14.0	17.324	5	15
006870	TL-240/14	240	14	21.2	118	14.5	38.4	18.0	16.0	17.978	5	15
006880	TL-240/16		16		119	16.5	38.4	18.0	17.0	17.914	5	15
006920	TL-300/16		300		16	23.4	132	16.5	41.7	19.0	18.0	22.698
006950	TL-400/16	400	16	26.8	140	16.5	47.8	21.0	19.0	32.130	4	8
006980	TL-500/16	500	16	29.8	143	16.5	54.8	22.0	19.0	53.430	1	7
006985	TL-630/16	630	16	34.5	155	16.5	64.4	22.0	19.0	85.713	1	3