


Connections / Copper connectors

10112 TD

Welded copper cable lug

TD cable lugs are manufactured from welded copper strip with a tin-plated surface finish to protect against oxidation. Their flat and compact design makes them ideal for space-constrained installations, especially in electrical panels and industrial equipment.

According to DIN 46234 standard.

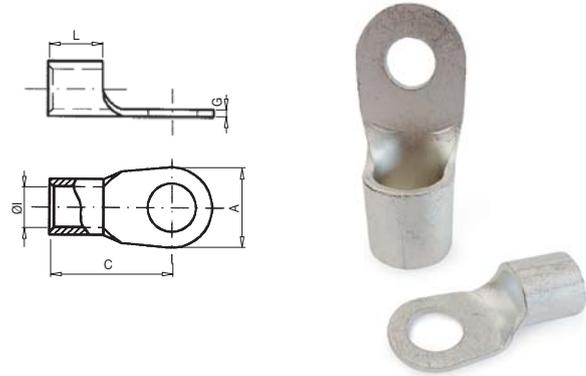

Code	Ref.	Section (mm ²)		Dimensions (mm)					Kg x 100	Bag	Box	
				ØI	L	A	C	G				
020100	TD-1,5/3	1.5	3	1.6	5.0	6.0	11.0	0.8	0.055	100	4000	
020110	TD-1,5/4		4			8.0	12.0					0.070
020120	TD-1,5/5		5			10.0	13.0					
020130	TD-2,5/3	2.5	3	2.3	5.0	6.0	11.0	0.8	0.064	100	3000	
020140	TD-2,5/4		4			8.0	12.0					0.077
020150	TD-2,5/5		5			10.0	14.0					
020160	TD-2,5/6	6				11.0	16.0		0.110	100	2000	
020170	TD-2,5/8	8				14.0	17.0		0.135	100	2000	
020180	TD-6/4	6	4	3.6	6.0	8.0	14.0	1.0	0.139	100	800	
020190	TD-6/5		5			10.0	15.0					0.157
020200	TD-6/6		6			11.0	16.0					
020210	TD-6/8	8				14.0	19.0		0.213	100	800	
020220	TD-6/10	10				18.0	21.0		0.279	100	800	
020230	TD-10/5	10	5	4.5	8.0	11.0	16.0	1.1	0.229	100	600	
020240	TD-10/6		6			11.0	17.0					0.240
020250	TD-10/8		8			14.0	20.0					
020260	TD-10/10	10				18.0	21.0		0.349	100	500	
020270	TD-10/12	12				22.0	23.0		0.414	100	400	
020280	TD-16/5	16	5	5.8	10.0	10.0	20.0	1.2	0.406	100	600	
020290	TD-16/6		6			11.0	20.0					0.381
020300	TD-16/8		8			14.0	22.0					
020310	TD-16/10	10				18.0	24.0		0.502	100	500	
020320	TD-16/12	12				22.0	26.0		0.600	100	400	
020330	TD-25/6	25	6	7.5	11.0	12.0	25.0	1.5	1.400	50	300	
020340	TD-25/8		8			16.0	25.0					1.480
020350	TD-25/10		10			18.0	26.0					
020360	TD-25/12	12				22.0	31.0		1.920	50	200	
020370	TD-25/16	16				28.0	35.0		2.320	50	200	
020380	TD-35/6	35	6	9.0	12.0	15.0	26.0	1.6	1.920	50	200	
020390	TD-35/8		8			26.0	26.0					1.920
020400	TD-35/10		10			18.0	27.0					
020410	TD-35/12	12				22.0	31.0		2.360	50	200	
020420	TD-35/16	16				28.0	36.0		2.880	50	200	


Connections / Copper connectors

10112 TD

Welded copper cable lug

TD cable lugs are manufactured from welded copper strip with a tin-plated surface finish to protect against oxidation. Their flat and compact design makes them ideal for space-constrained installations, especially in electrical panels and industrial equipment.

According to DIN 46234 standard.

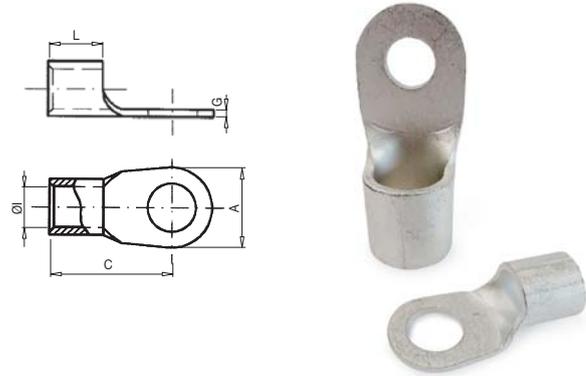

Code	Ref.	Section (mm ²)		Dimensions (mm)					Kg x 100	Bag	Box				
				ØI	L	A	C	G							
020430	TD-50/6	50	6	11.0	16.0	18.0	34.0	1.8	1.760	25	150				
020440	TD-50/8		8			18.0	34.0		1.720	25	150				
020450	TD-50/10		10			18.0	34.0		1.680	25	150				
020460	TD-50/12		12			22.0	36.0		1.840	25	150				
020470	TD-50/16		16			28.0	40.0		2.120	25	100				
020480	TD-70/6	70	6	13.0	18.0	22.0	38.0	2.0	2.600	10	80				
020490	TD-70/8		8			22.0	38.0		2.600	10	80				
020500	TD-70/10		10			22.0	38.0		2.600	10	80				
020510	TD-70/12		12			22.0	38.0		2.600	10	80				
020520	TD-70/16		16			22.0	38.0		2.600	10	80				
020530	TD-95/8	95	8	15.0	20	24.0	42.0	2.5	4.100	10	60				
020540	TD-95/10		10			24.0	42.0		4.100	10	60				
020550	TD-95/12		12			24.0	42.0		4.000	10	60				
020560	TD-95/16		16			28.0	44.0		4.100	10	60				
020570	TD-120/8		120			8	16.5		22	24.0	44.0	3.0	5.600	10	60
020580	TD-120/10	10		24.0	44.0	6.200		10		60					
020590	TD-120/12	12		24.0	44.0	5.400		10		60					
020600	TD-120/16	16		28.0	48.0	5.700		10		40					
020610	TD-150/10	150		10	19.0	24		30.0		50.0	3.2		8.400	5	30
020620	TD-150/12		12	30.0			50.0	8.600	5	25					
020630	TD-150/16		16	30.0			50.0	7.700	5	20					
020640	TD-185/10		185	10			21.0	28	36.0	50.0		3.5	11.100	5	20
020650	TD-185/12			12					36.0	50.0			10.800	5	20
020660	TD-185/16	16		36.0	50.0	10.700			5	20					
020670	TD-240/10	240		10	23.5	32			38.0	56.0	4.0		15.200	5	20
020680	TD-240/12			12					38.0	56.0			15.000	5	20
020690	TD-240/16		16	38.0			56.0	14.700	5	15					