


10110 M

Copper butt-connector

M copper butt connectors are manufactured from electrolytic copper tubing with a tin-plated surface finish to improve electrical contact. They incorporate a central stop to facilitate correct cable positioning, ensuring a secure and reliable connection.

According to IEC 61238-1-1 standard.

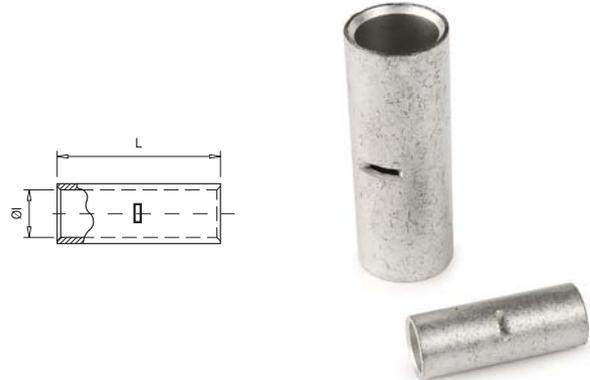

Code	Ref.	Section (mm ²)	Dimensions (mm)		Kg x 100	Bag	Box
			ØI	L			
015100	M-1,5	1.5	1.8	15.0	0.072	100	5000
015110	M-2,5	2.5	2.7	15.0	0.109	100	3500
015120	M-4	4	3.3	22.0	0.204	100	1600
015130	M-6	6	3.8	22.0	0.227	100	1300
015140	M-10	10	4.7	25.0	0.397	100	800
015150	M-16	16	5.6	27.0	0.516	100	600
015160	M-25	25	7.1	29.0	0.730	50	400
015170	M-35	35	8.7	33.0	1.127	50	250
015190	M-50	50	9.8	35.0	1.434	20	200
015200	M-70	70	11.5	39.0	2.149	20	120
015210	M-95	95	13.5	43.0	2.906	20	80
015220	M-120	120	15.6	47.0	4.730	10	60
015230	M-150	150	16.5	58.0	6.375	10	50
015240	M-185	185	18.9	64.0	8.929	10	40
015250	M-240	240	21.2	75.0	11.834	5	30
015260	M-300	300	23.4	90.0	16.082	5	15
015270	M-400	400	26.8	90.0	20.998	5	10
015280	M-500	500	29.8	98.0	40.235	1	5
015290	M-630	630	34.5	105.0	64.730	1	1