


Connections / Copper connectors

10104 T90° Copper cable lug 90°

T90° cable lug manufactured from electrolytic copper tubing with a tin-plated surface finish to electrical contact.

Its particular orientation makes it suitable for installations where connection needs a specific placement.

According to IEC 61238-1-1 standard.

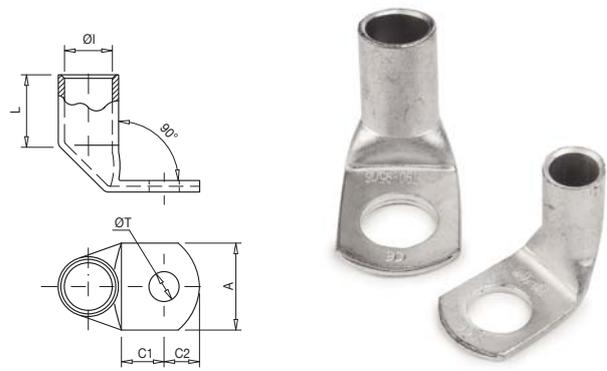

Code	Ref.	Section (mm ²)		Dimensions (mm)						Kg x 100	Bag	Box
				ØI	L	ØT	A	C1	C2			
008270	T90-10/6	10	6	4.7	10	6.4	11.9	7.0	6.0	0.374	100	800
008280	T90-10/8		8			8.3	15.0	8.0	8.0	0.396	100	700
008290	T90-10/10		10			10.5	18.0	11.0	10.0	0.444	100	100
008320	T90-16/6	16	6	5.6	11	6.4	11.9	7.0	6.0	0.500	100	600
008330	T90-16/8		8			8.3	15.0	8.0	7.5	0.509	100	600
008370	T90-25/8	25	8	7.1	13	8.3	15.0	8.5	7.5	0.768	50	300
008380	T90-25/10		10			10.5	18.0	11.0	10.0	0.813	50	300
008420	T90-35/8	35	8	8.7	16	8.3	15.7	9.0	8.0	1.295	50	250
008430	T90-35/10		10			10.5	19.0	11.0	10.0	1.157	50	200
008520	T90-50/10	50	10	9.8	19	10.5	20.0	11.0	10.0	1.788	20	160
008530	T90-50/12		12			13.0	21.0	13.0	12.0	1.983	20	160
008580	T90-70/10	70	10	11.5	21	10.5	21.5	11.0	10.0	2.586	20	100
008590	T90-70/12		12			13.0	12.0	11.0	2.614	20	100	
008660	T90-95/14	95	14	13.5	24	14.5	24.7	15.0	13.0	3.737	20	60
008670	T90-95/16		16			16.5	27.0	16.0	15.0	3.730	20	60
008720	T90-120/14	120	14	15.6	28	14.5	28.9	16.0	14.0	6.350	10	30
008730	T90-120/16		16			16.5	17.0	16.0	6.508	10	30	
008770	T90-150/14	150	14	16.5	32	14.5	30.4	18.0	16.0	8.000	10	30
008780	T90-150/16		16			16.5		18.0	16.0	7.860	10	30
008830	T90-185/16	185	16	18.8	34	16.5	34.0	18.0	17.0	10.850	10	20
008880	T90-240/16	240	16	21.2	38	16.5	38.4	18.0	17.0	13.630	5	15