

### Connections / Copper connectors

## 10113 TCD


### DIN 46235 copper cable lug

TCD copper cable lugs are manufactured from electrolytic copper tin-plated surface finish to protect against oxidation. Their reinforced design makes them particularly suitable for installations exposed to vibration or high mechanical stress.

According to DIN 46235 standard.



UL certified.

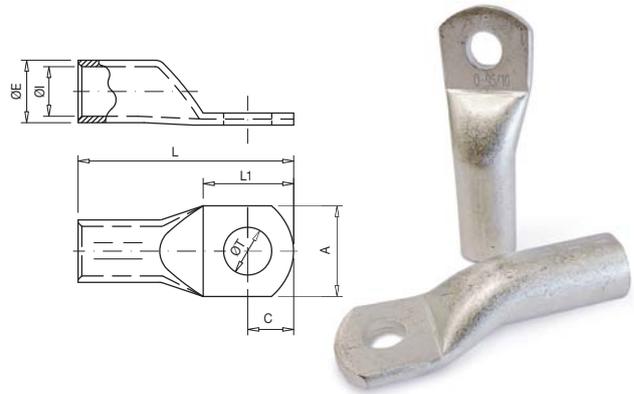

Code	Ref.	Section (mm <sup>2</sup> )		Dimensions (mm)							Kg x 100	Bag	Box			
				ØE	ØI	L	ØT	A	L1	C						
005270	TCD-10/6	10	6	6.0	4.5	37.5	6.4	9.0	19.5	9.5	0.350	100	700			
005280	TCD-10/8		8			40.0	8.4	13.0	21.0	11.0				0.354	100	600
005320	TCD-16/6	16	6	8.5	5.5	46.5	6.4	13.0	18.5	9.5	1.194	50	250			
005330	TCD-16/8		8			49.0	8.4	13.0	23.0	11.0				1.206	50	250
005370	TCD-25/8	25	8	10.0	7.0	51.0	8.4	16.0	23.0	12.0	1.551	50	200			
005380	TCD-25/10		10			53.0	10.5	17.0	27.0	14.0				1.543	50	200
005420	TCD-35/8	35	8	12.5	8.2	55.0	8.4	17.5	23.0	12.0	3.010	20	120			
005430	TCD-35/10		10			57.0	10.5	19.0	27.0	14.0				2.997	20	120
005520	TCD-50/10	50	10	14.5	10.0	67.0	10.5	22.0	27.0	14.0	4.497	20	100			
005530	TCD-50/12		12			68.0	13.0	24.0	29.0	15.0				4.403	20	100
005580	TCD-70/10	70	10	16.5	11.5	70.0	10.5	24.0	27.0	14.0	6.029	20	60			
005590	TCD-70/12		12			71.0	13.0	24.0	27.0	14.0				6.065	20	60
005650	TCD-95/12	95	12	19.0	13.5	78.0	13.0	28.0	26.0	13.0	8.373	10	40			
005660	TCD-95/14		14			79.5	15.0	32.0	29.0	14.5				8.357	10	40
005670	TCD-95/16		16			81.0	17.0	32.0	32.0	16.0				8.596	10	40
005700	TCD-120/10	120	10	21.0	15.5	85.0	10.5	30.0	27.0	14.0	10.728	10	30			
005710	TCD-120/12		12			86.0	13.0	30.0	29.0	15.0				10.436	10	30
005720	TCD-120/14		14			88.0	15.0	30.0	31.0	16.0				10.820	10	30
005730	TCD-120/16		16			89.0	17.0	30.0	35.0	18.0				10.650	10	30
005760	TCD-150/12	150	12	23.5	17.0	94.0	13.0	34.0	29.0	15.0	13.374	10	20			
005770	TCD-150/14		14			96.0	15.0	34.0	31.0	16.0				15.514	10	20
005780	TCD-150/16		16			97.0	17.0	34.0	35.0	18.0				15.436	10	20
005810	TCD-185/12		12			98.0	13.0	37.0	29.0	15.0				18.167	10	20
005820	TCD-185/14	185	14	25.5	19.0	100.0	15.0	37.0	31.0	16.0	17.852	10	20			
005830	TCD-185/16		16			101.0	17.0	37.0	35.0	18.0				18.227	10	20
005860	TCD-240/12	240	12	29.0	21.5	108.0	13.0	42.0	29.0	15.0	25.766	5	10			
005870	TCD-240/14		14			110.0	15.0	42.0	31.0	16.0				25.780	5	10
005880	TCD-240/16		16			111.0	17.0	42.0	35.0	18.0				26.587	5	10
005920	TCD-300/16		300			16	32.0	24.5	119.0	17.0				48.0	35.0	18.0
005950	TCD-400/16*	400	16	38.5	27.5	140.0	17.0	55.0	45.0	24.0	53.380	2	4			
005980	TCD-500/16*	500	16	42.0	31.0	150.0	17.0	60.0	45.0	24.0	78.187	1	4			

\*Not according to UL certified.