

Shear Head Bolt Connectors

Connection

CONNECTION CATALOGUE




10204 MTSA

Insulated shear head bolt connector

Joint sleeve fuse for aluminium connection of sections ranging from 25 to 240 mm². Recommended for underground networks. Installation through torque using insulated fuse connectors. Sleeve in high-resistance aluminium alloy. Fitted with insulating cover and sealing ring at the ends.

According to UNE 211022 standard. Have the  AENOR certificate mark.




25 - 50 mm²




95 - 150 mm²





50 - 95 mm²

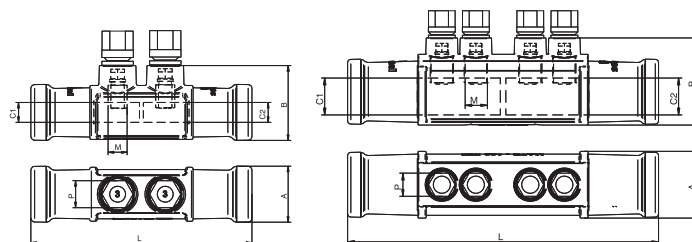

150 - 240 mm²



Code	Ref.	Section mm ²	Cable section		Dimensions (mm)					Kg x 100	 Bag	 Box	
			C1	C2	A	B	L	M	P				Par Nm
101250	MTSA-50	25-50	25-50	25-50							16,000	1	-
101255	MTSA-95	50-95	50-95	50-95	35	47	139	2 x M12	17	22 ±2	16,000	1	-
101270	MTSA-25/95	25-95	25-50	50-95							16,000	1	-
101260	MTSA-150	95-150	95-150	95-150							51,000	1	-
101265	MTSA-240	150-240	150-240	150-240	48	64	229	4 x M17	17	30 ±3	51,000	1	-
101275	MTSA-95/240	95-240	95-150	150-240							51,000	1	-