

Connections / Shear head bolt connectors



10204 MTSA

Insulated shear head bolt connector

Splice sleeve for aluminium conductors with cross-sections from 25 to 240 mm², especially recommended for low-voltage underground networks. Designed for a rated voltage of 0.6/1 kV, the splice is installed using insulated shear-head bolts, ensuring a quick and reliable connection.

Manufactured from high-strength aluminium alloy, the sleeve includes an insulating cover and sealing grommets at both ends, providing excellent protection against moisture and corrosion.

According to UNE 211022 standard and certified with the AENOR  mark.

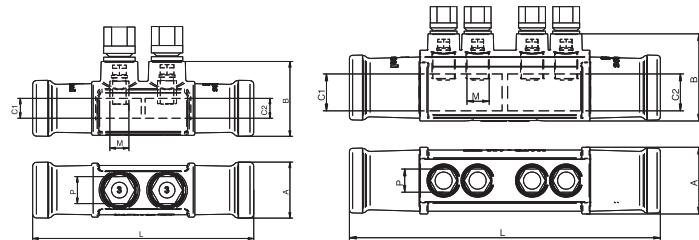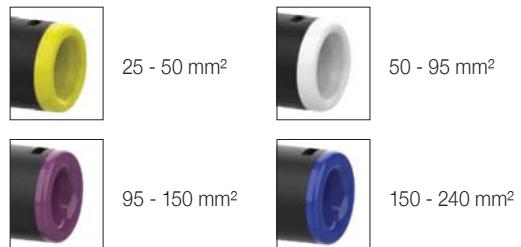

Code	Ref.	Section (mm ²)	Cable cross-section		Dimensions (mm)						x 100	Bag	Box
			C1	C2	A	B	L	M	P	Par Nm			
101250	MTSA-50	25-50	25-50	25-50							16.000	1	-
101255	MTSA-95	50-95	50-95	50-95	35	47	139	2 x M12	17	22 ±2	16.000	1	-
101270	MTSA-25/95	25-95	25-50	50-95							16.000	1	-
101260	MTSA-150	95-150	95-150	95-150							51.000	1	-
101265	MTSA-240	150-240	150-240	150-240	48	64	229	4 x M17	17	30 ±3	51.000	1	-
101275	MTSA-95/240	95-240	95-150	150-240							51.000	1	-