

Shear Head Bolt Connectors

Connections





10204 MTSA

Insulated shear head bolt connector

Joint sleeve fuse for aluminium connection of sections ranging from 25 to 240 mm².
Recommended for underground networks.
Installation through torque using insulated fuse connectors.
Sleeve in high-resistance aluminium alloy.
Fitted with insulating cover and sealing ring at the ends.

According to UNE 211022 standard.
Have the  AENOR certified mark.

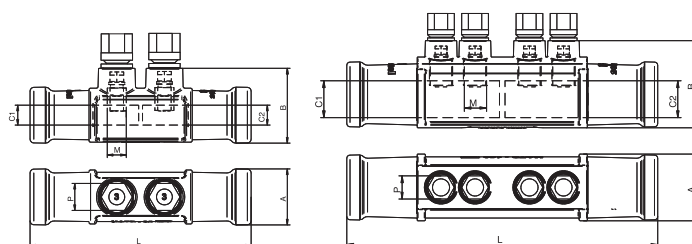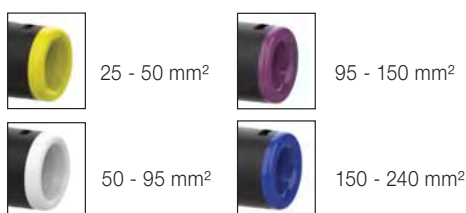

Code	Ref.	Section mm ²	Section Cable		Dimensions (mm)						Kg x 100	Bag	Box
			C1	C2	A	B	L	M	P	Par Nm			
101250	MTSA-50	25-50	25-50	25-50							16.000	1	-
101255	MTSA-95	50-95	50-95	50-95	35	47	139	2 x M12	17	22 ±2	16.000	1	-
101270	MTSA-25/95	25-95	25-50	50-95							16.000	1	-
101260	MTSA-150	95-150	95-150	95-150							51.000	1	-
101265	MTSA-240	150-240	150-240	150-240	48	64	229	4 x M17	17	30 ±3	51.000	1	-
101275	MTSA-95/240	95-240	95-150	150-240							51.000	1	-

sofamel