
10204 MTSA

Insulated shear head bolt connector

Splice sleeve for aluminium conductors with cross-sections from 25 to 240 mm², especially recommended for low-voltage underground networks. Designed for a rated voltage of 0.6/1 kV, the splice is installed using insulated shear-head bolts, ensuring a quick and reliable connection.
Manufactured from high-strength aluminium alloy, the sleeve includes an insulating cover and sealing grommets at both ends, providing excellent protection against moisture and corrosion.


According to UNE 211022 standard and certified with the AENOR mark.





25 - 50 mm²


50 - 95 mm²


95 - 150 mm²


150 - 240 mm²

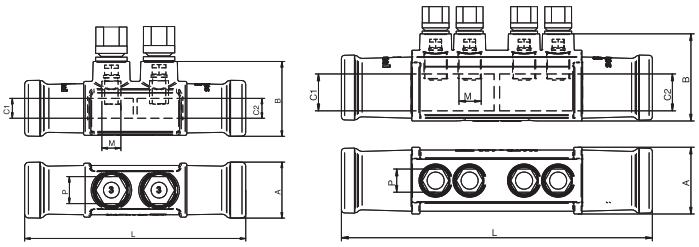

Code	Ref.	Section (mm²)	Cable cross-section C1	Cable cross-section C2	Dimensions (mm) A	B	L	M	P	Par Nm	Kg x100	Bag	Box
101250	**MTSA-50**	25-50	25-50	25-50							16.000	1	-
101255	**MTSA-95**	50-95	50-95	50-95	35	47	139	2 x M12	17	22 ±2	16.000	1	-
101270	**MTSA-25/95**	25-95	25-50	50-95							16.000	1	-
101260	**MTSA-150**	95-150	95-150	95-150							51.000	1	-
101265	**MTSA-240**	150-240	150-240	150-240	43	61	234	4 x M17	17	30 ±3	51.000	1	-
101275	**MTSA-95/240**	95-240	95-150	150-240							51.000	1	-