


Connections / Shear head bolt connectors

10201 TTG2

Shear head bolt cable lug

TTG/2 cable lugs are manufactured by injection molding from high-conductivity aluminium with a purity of 99.5% or higher, and feature an electrolytic tin-plated surface finish covering the entire lug.

Manufactured according to UNE 211024-3 standard.

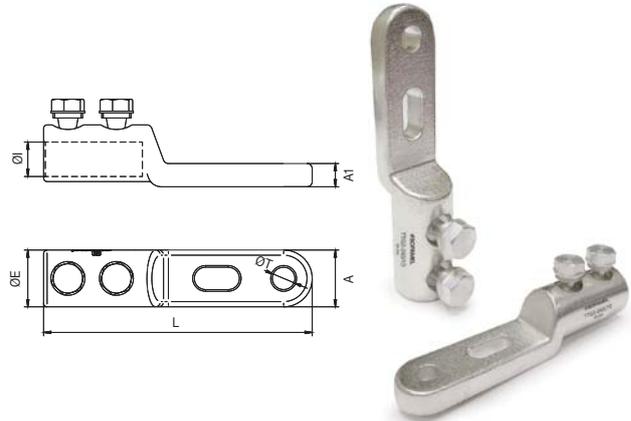

Code	Ref.	Section (mm ²)		Strip length			Dimensions (mm)						Kg x 100	Bag	Box
							ØE	ØI	L	ØT	A	A1			
101180	TTG/2-240/10	95 - 240	2	60	2 x M17	17	33	20	155	11	33	13.5	22.300	1	-
101185	TTG/2-240/12	95 - 240	2	60	2 x M17	17	33	20	155	13	33	13.5	21.700	1	-
10201001	TTG2-400/12	240 - 400	2	75	2 x M22	22	40	26	180	13	40	13.5	29.700	1	-
10201002	TTG2-400/16	240 - 400	2	75	2 x M22	22	40	26	180	17	40	13.5	29.700	1	-
10201003	TTG/2-630/12	400 - 630	2	95	2 x M24	24	55	32	215	13	55	21.0	74.000	1	-