

# Shear Head Bolt Connectors


## Connections







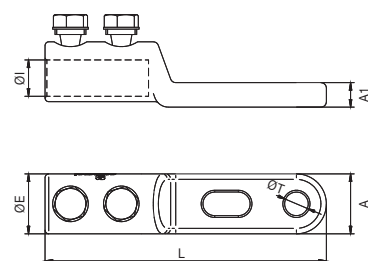

### 10201 TTG2

#### Shear head bolt cable lug

TTG/2 cable lugs are manufactured by injection molding of high-conductivity aluminium of purity higher than 99.5%, with a tinned surface finish over the entire surface of the cable lug by means of electrolytic bath.



Code	Ref.	Section (mm <sup>2</sup> )		Strip length			Dimensions (mm)								
							ØE	ØI	L	ØT	A	A1			
101180	TTG/2-240/10	95 - 240	2	60	2 x M17	17	33	20	155	11	33	13.5	22.300	1	-
101185	TTG/2-240/12						33	20	155	13	33	13.5	21.700	1	-
10201001	TTG/2-400/12	240 - 400	2	75	2 x M22	22	40	26	180	13	40	13.5	29.700	1	-
10201002	TTG/2-400/16						40	26	180	17	40	13.5	29.700	1	-
10201003	TTG/2-630/12	630	2	95	2 x M24	24	55	32	215	13	55	21.0	-	1	-