


Bimetallic Connectors

Connection

CONNECTION CATALOGUE

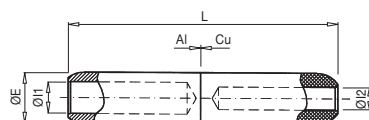

135 RJAU

Bimetallic joint

RJAU bimetallic joint manufactured from aluminium alloy of purity equal or higher than 99.5% and electrolytic copper tube. The two parts of the bimetallic connector are joined through a friction stir welding process. Incorporates neutral grease in the aluminium part hole to avoid its oxidation.


According to NF C33-090-1 standard.

Code	Ref.	Section (mm ²)		Dimensions (mm)				kg x 100	Bag	Box
		Al	Cu	ØE	ØI1	ØI2	L			
135100	RJ1AU-50/25	50	25	20	9	7	106,5	18,402	1	25
135101	RJ1AU-50/35		35			8		17,504	1	25
135157	RJ1AU-70/35	70	35	20	11	8	106,5	17,050	1	25
135105	RJ1AU-70/50		50			9,5		16,360	1	25
135110	RJ1AU-95/50	95	50	20	12,5	9,5	106,5	15,930	1	25
135111	RJ1AU-95/70		70			11		14,310	1	25
135114	RJ2AU-120/50	120	50	25	13,7	9,5	133	28,960	1	15
135115	RJ2AU-120/70		70			11		27,340	1	15
135116	RJ2AU-120/95		95			13		25,910	1	15
135124	RJ2AU-150/70	150	70	25	15,5	11	133	26,510	1	15
135130	RJ2AU-150/95		95			13		25,080	1	15
135121	RJ2AU-150/120		120			14,2		23,810	1	15
135167	RJ4AU-185/95		95			13		48,110	1	8
135154	RJ4AU-185/120	185	120	32	17,0	14,2	143,5	46,910	1	8
135168	RJ4AU-185/150		150			16		44,710	1	8

Other sections under request.

Bimetallic Connectors

Connection



135 RJ4U

Bimetallic joint

RJ4U bimetallic joint manufactured from aluminium alloy of purity equal or higher than 99.5% and electrolytic copper tube. The two parts of the bimetallic connector are joined through a friction stir welding process. Incorporates neutral grease in the aluminium part hole to avoid its oxidation.

According to NF C33-090-1 standard.

Code	Ref.	Section (mm ²)		Dimensions (mm)				kg x 100	Bag	Box
		Al	Cu	ØE	ØI1	ØI2	L			
135137	RJ4AU-240/95	240	95	32	19,5	13	143,5	46,409	1	8
135138	RJ4AU-240/120		120			14,2		45,290	1	8
135140	RJ4AU-240/150		150			16		43,009	1	8
135144	RJ4AU-240/185		185			18		41,109	1	8
135177	RJ5AU-300/150	300	150	40	23,3	16	218	73,810	1	-
135178	RJ5AU-300/185		185			18		71,810	1	-
135179	RJ5AU-300/240		240			20		68,110	1	-
135188	RJ5AU-400/185	400	185	40	26,0	18	218	69,450	1	-
135189	RJ5AU-400/240		240			20		65,750	1	-
135190	RJ5AU-400/300		300			23		59,150	1	-
135191	RJ5AU-400/400		400			-		-	1	-

Other sections under request.