


Bimetallic Connectors


Connections



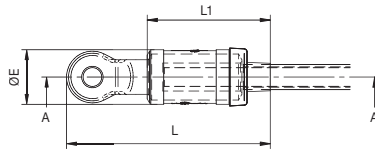


10404 TDC/S KIT

Insulated bimetallic terminals

The kit consists of:

- TDC/S terminal manufactured from aluminium alloy bar with a purity of 99.5% or higher. Featuring an electrolytic tin-plating treatment. Complies with the UNE 211024-2 standard and  AENOR certified.
- Insulating cover in synthetic rubber.
- Phase or neutral identification rings.
- Connection washers.

Code	Ref.	Section (mm ²)	Strip length	Dimensions (mm)			 x 100	 Bag	 Box
				ØE	L	L1			
111118 K	TDC/S-50/8 K						8.000	1	40
111119 K	TDC/S-50/10 K	50	45				8.700	1	40
111120 K	TDC/S-50/12 K			26	100	51	8.300	1	40
111139 K	TDC/S-95/10 K	95	45				8.100	1	40
111140 K	TDC/S-95/12 K						7.800	1	40
111159 K	TDC/S-150/10 K	150	60	31	128	68	12.000	1	30
111160 K	TDC/S-150/12 K						12.700	1	30
111180 K	TDC/S-240/12 K	240	60	38	140	86	19.300	1	25