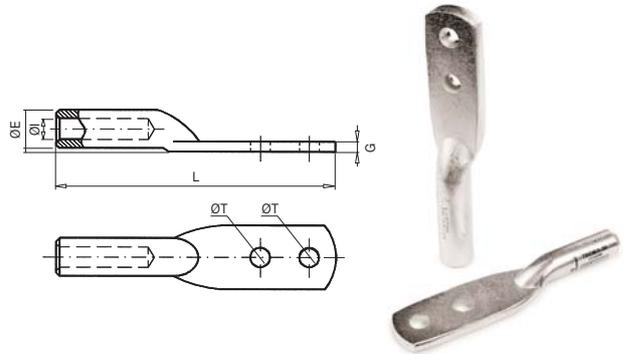


Connections / Bimetallic connectors

10402 TBEM/A

Tinned bimetallic cable lug

TBEM/A bimetallic cable lugs are manufactured from aluminium bars with a purity of 99.5% or higher. The entire connector surface features a tin-plated finish applied by electrolytic plating. Neutral grease is applied internally to prevent aluminium oxidation. Designed for overhead cable connections.


Overhead cables

Code	Ref.	Section (mm ²)	Dimensions (mm)					Kg x 100	Bag	Box
			ØE	ØI	ØT	G	L			
125190	TBEM/A-30	LA-30	20.0	7.6	13.0	7.7	170	12.200	1	80
125200	TBEM/A-56	LA-56	20.0	10.0	13.0	7.7	170	11.800	1	80
125210	TBEM/A-78	LA-78	20.0	12.0	13.0	7.7	170	10.600	1	80
125230	TBEM/A-110	LA-110	25.0	14.5	13.0	11.6	190	19.800	1	40
125250	TBEM/A-180	LA-180	32.0	18.3	13.0	11.6	199	32.500	1	30

* For other sizes, please inquire. Supplied without screws.