


Connections / Aluminium connectors

10304 RJA

Aluminium joint

RJA butt connectors are manufactured from aluminium tubing with a purity of 99.5% or higher. They feature a stop that allows the conductors to be centred, dividing the connector into two symmetrical sections to facilitate crimping. Both ends are filled with neutral conductive grease to prevent aluminium oxidation and improve electrical conductivity.

According to UNE 211024 standard and certified with the AENOR  mark.*

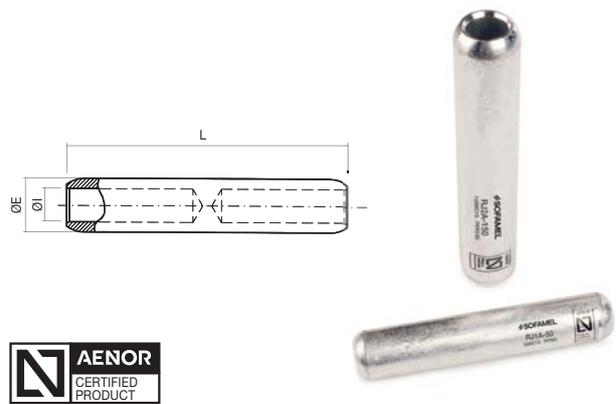

Code	Ref.	Section (mm ²)	Dimensions (mm)			Kg x 100	Bag	Box
			ØE	ØI	L			
095100	RJ1A-25	25	20.0	6.5	106.5	7.900	1	125
095110	RJ1A-35	35	20.0	8.0	106.5	7.600	1	125
095120	RJ1A-50*	50	20.0	9.0	106.5	7.160	1	125
095130	RJ1A-70	70	20.0	11.0	106.5	7.000	1	125
095140	RJ1A-95*	95	20.0	12.5	106.5	5.700	1	125
095150	RJ2A-120	120	25.0	13.7	133.0	13.000	1	90
095160	RJ2A-150*	150	25.0	15.5	133.0	11.300	1	90
095170	RJ4A-185	185	32.0	17.0	143.5	22.000	1	50
095180	RJ4A-240*	240	32.0	19.5	143.5	19.000	1	50
095190	RJ5A-300	300	40.0	23.3	218.0	48.000	1	15
095200	RJ5A-400*	400	40.0	26.0	218.0	43.000	1	15