

# sofamel

Technical Product Specifications

## Reference PA-25

Line connection anchor

### Functionality

For NFC 33-209 stranded overhead conductors with sections  $2 \times 16 \text{ mm}^2$  to  $4 \times 25 \text{ mm}^2$  ( $\varnothing$  of conductors from 7 mm to 9.4 mm).

The clamp is made of waterproof and anti-UV material with high mechanical strength.

A specially designed ring is used to prevent the metal bracket from sliding off the clamp body.



Easy installation without additional tools.

No loose parts could come off during installation.

### Raw Material Characteristics

Body and wedge: PA66. Thermoplastic body reinforced with fiberglass both body and wedge

Ring: Stainless steel.

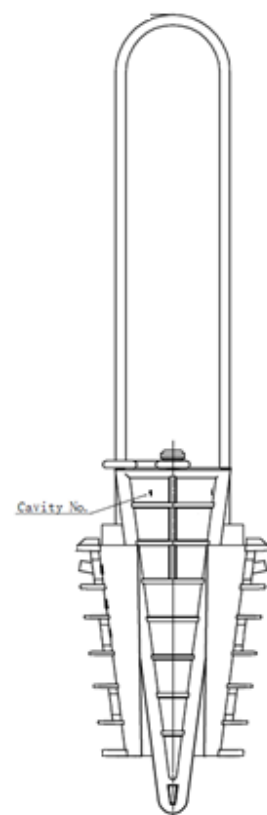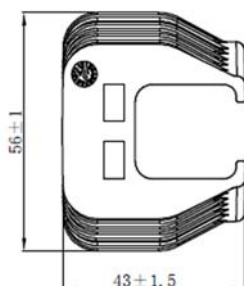




## Model PA-25

Line connector anchor

---

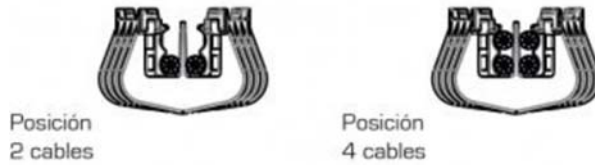

**Section: Min: 2x16, Max: 4x25**

**Falling weight: 1.9 KN**

### Certificados

Standards-based testing:

**UNE-EN 50483-2: 2013** Test requirements for low voltage braided overhead network accessories. Part 2: Mooring and suspension clamps for self-supported nets.

**NFC 33 042: 2013** Insulated cables and their accessories for power systems - anchoring devices for overhead distribution with insulated cables of rated voltage 0,6 / 1 kv.