


Aluminium Connectors

Connections

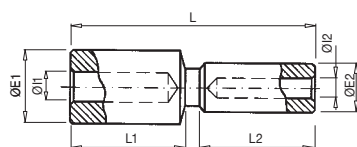

10303 RBT

Reducer aluminium joint

RBT joint manufactured from aluminium alloy of purity equal or higher than 99.5%. Incorporates a central buffer stop which divides the joint in two equal parts. Both holes contain neutral grease to avoid aluminium oxidation

Code	Ref.	Section Al. (mm ²)		Dimensions (mm)							Kg x 100	Bag	Box
		1	2	ØE1	ØI1	ØE2	ØI2	L	L1	L2			
090100	RBT-50/25	50	25	20.0	9.0	20.0	6.5	100.0	47.5	47.5	7.000	1	125
090110	RBT-95/50	95	50	20.0	12.5	20.0	9.0	100.0	47.5	47.5	5.000	1	125
090120	RBT-150/50	150	50	25.0	15.5	20.0	9.0	118.5	64.0	47.5	9.000	1	75
090130	RBT-150/95	150	95	25.0	15.5	20.0	12.5	118.5	64.0	47.5	8.800	1	75
090140	RBT-240/95	240	95	32.0	19.5	20.0	12.5	118.5	64.0	47.5	13.600	1	50
090150	RBT-240/150	240	150	32.0	19.5	25.0	15.5	135.0	64.0	64.0	16.000	1	50

* Consult for other reducers.