


Connections / Copper connectors

10114 MCD

DIN 46267 copper butt-connector

MCD butt connectors are manufactured from electrolytic copper with a tin-plated surface finish to protect against oxidation. They are designed for joining copper conductors by crimping.

Manufactured according to the standardized dimensions of DIN 46267.

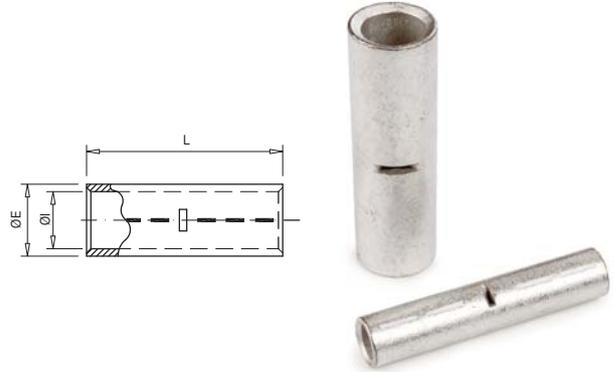

Code	Ref.	Section (mm ²)	Dimensions (mm)			Kg x 100	Bag	Box
			ØE	ØI	L			
004130	MCD-6	6	5.5	3.8	30	0.317	100	1000
004140	MCD-10	10	6.0	4.5	30	0.320	100	700
004150	MCD-16	16	8.5	5.5	50	1.387	100	200
004160	MCD-25	25	10.0	7.0	50	1.683	50	150
004170	MCD-35	35	12.5	8.2	50	2.988	20	120
004190	MCD-50	50	14.5	10.0	56	4.073	20	80
004200	MCD-70	70	16.5	11.5	56	5.169	20	60
004210	MCD-95	95	19.0	13.5	70	8.157	10	40
004220	MCD-120	120	21.0	15.5	70	8.231	10	40
004230	MCD-150	150	23.5	17.0	80	13.810	10	30
004240	MCD-185	185	25.5	19.0	85	16.332	5	25
004250	MCD-240	240	29.0	21.5	90	22.368	5	15
004260	MCD-300	300	32.0	24.5	100	27.634	5	10
004270	MCD-400	400	38.5	27.5	150	73.500	2	6
004280	MCD-500	500	42.0	31.0	160	86.740	1	2
004290	MCD-625	625	44.0	34.5	160	79.900	1	2
004300	MCD-800	800	52.0	40.0	200	151.616	1	8
004310	MCD-1000	1000	58.0	44.0	200	197.510	1	8